



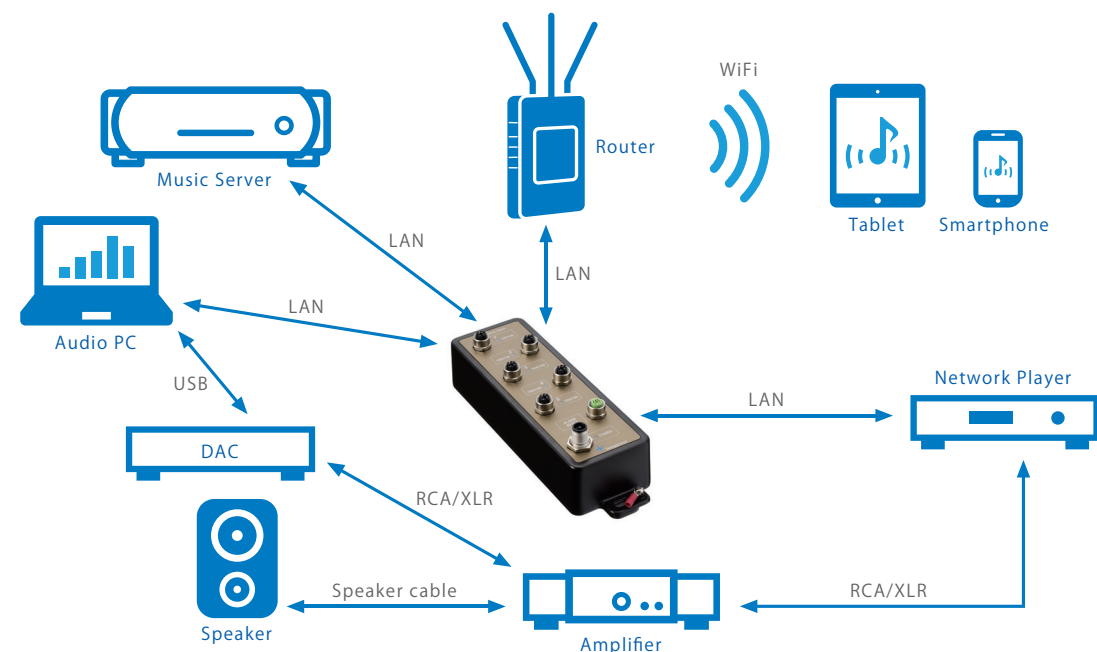

Specifications M12 SWITCH IE GOLD

standards	
IEEE 802.3, IEEE802.3u, IEEE802.3ab	
layer-2 data transfer function	
data transfer method	store-and-forward
MAC address table	8k entries
packet memory buffer	500k byte
jumbo frame (maximum packet length)	9.6k byte
forwarding rate (unicast data transfer)	TP/LAN port 1000Mbps link: 1,488,100 packets/s between ports TP/LAN port 100Mbps link: 148,810 packets/s between ports
interface/ connector	
TP/LAN (Ethernet) port	10/100/1000BASE-T (automatic recognition) x 5 ports connector: M12 X-coded (male) plug IEC 61076-2-109 Ed. 1.0 cable: 4 pair Category 6 or above S/FTP cable (MA0001C0x00)
DC power input port	1 port connector: M12 T-coded (female) plug pin assignment: #1/#2: DC+, #3/#4: DC- power adapter: included in the set, without AC power cable
dimension and functionality of the unit	
chassis material	aluminium die-cast (alumite surface treatment)
class of the unit & connector	IP67 (including connectors)
external dimension	70 (W) x 200 (L) x 50 (H) mm
weight	1.5 kg
DC input specifications	
input voltage	DC 10 V ~ 60 V
power consumption	6 W max.
protection function	over-current protection, reverse polarity protection (automatic inversion)
ambient specifications	
operating temperature	-40 ~ +70 °C
operating humidity	5 ~ 95 %RH (without condensation)
storage temperature	-40 ~ +85 °C

M12 X-coded / MFP8 IE GOLD Patch code

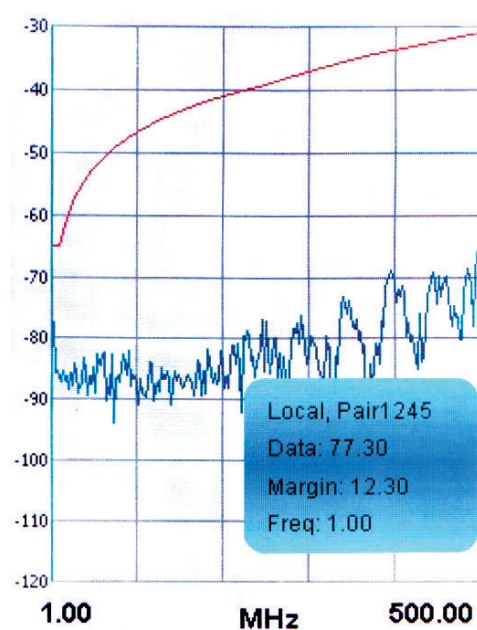

NEXT date

BEST CONTACTS FOR YOUR SUCCESS

Telegärtner
JAPAN LIMITED

NETWORKING COMPONENTS

COAXIAL CONNECTORS

CABLE/ASSEMBLIES

PRECISION TURNED PARTS

PLASTIC INJECTION MOULD PARTS

INDUSTRIAL ELECTRONICS



M12 SWITCH IE GOLD



Japan Telegärtner Ltd.

N.E.S. Bldg. 7F, 22-14, Sakuragaoka-cho,
Shibuya-ku Tokyo, Japan 150-0031

TEL 03-6455-3210 FAX 03-6455-3212

✉ sales@telegaertner.co.jp

<https://www.telegaertner.co.jp/>

Japan Telegärtner Ltd.

<http://www.telegaertner.co.jp>

FLI-FNEMAR20-0084A



■ OPTIONAL CABLE / EXTRA CABLE FOR M12 SWITCH IE GOLD	
MA0IE1C0100	M12 X CODE/MFP8 IE GOLD CABLE 1.0m
MA0IE1C0150	M12 X CODE/MFP8 IE GOLD CABLE 1.5m
MA0IE1C0200	M12 X CODE/MFP8 IE GOLD CABLE 2.0m



THE ULTIMATE NETWORK HUB FOR NETWORK AUDIO

M12 SWITCH *IE* GOLD

■ M12 SWITCH IE GOLD SET

- M12 SWITCH IE GOLD
- POWER SUPPLY ADAPTOR WITH T CODE
- AC POWER SUPPLY CODE (1.5m)
- LAN CABLE 2 pcs

■ M12 SWITCH IE GOLD SET Price List

- MA-M12IE-SETB M12 SWITCH IE GOLD SET (CABLE 2.0m×1, 2.0m×1)
- MA-M12IE-SETC M12 SWITCH IE GOLD SET (CABLE 1.0m×1, 1.0m×1)
- MA-M12IE-SETD M12 SWITCH IE GOLD SET (CABLE 1.0m×1, 1.5m×1)
- MA-M12IE-SETE M12 SWITCH IE GOLD SET (CABLE 1.0m×1, 2.0m×1)
- MA-M12IE-SETF M12 SWITCH IE GOLD SET (CABLE 1.5m×1, 1.5m×1)
- MA-M12IE-SETG M12 SWITCH IE GOLD SET (CABLE 1.5m×1, 2.0m×1)

